



*VidyoRoom HD-50 makes room-based video conferencing affordable while delivering superior performance to traditional alternatives.*

### VidyoRoom HD-50 Benefits:

- Easy to deploy and use
- Stunning HD quality without noticeable delay
- Works over general purpose IP networks
- Integrates seamlessly with VidyoDesktop and with legacy room systems via VidyoGateway
- Consumes no VidyoLine licenses – economical deployment and connectivity to other users

# VidyoRoom HD-50

The perfect solution for small conference rooms or personal desktop deployments, the VidyoRoom HD-50 lowers the entry price for an HD video conferencing room system while delivering telepresence quality using Vidyo's patented technology. No more lost time in making complicated connections or waiting for IT support to start the conference! The VidyoRoom HD-50's intuitive user interface makes starting a conference as easy as pressing a button. Once that button is pressed, you and your conference participants will enjoy the natural, same-room feel and interactivity made possible by crisp, 720p 30 FPS video with imperceptible latency. In addition to displaying data and video on separate screens, you'll be able to choose between active speaker and continuous presence layouts, independently of all other participants, via a click of a button. Since a VidyoRoom does not consume a VidyoLine™ license, the cost of deploying the VidyoRoom HD-50 as part of a VidyoConferencing™ solution is limited to the room system itself. And more significant than the equipment cost savings – including a low-cost off the shelf USB HD camera – is that your operating budget will get some welcomed relief since the VidyoRoom HD-50 is designed to work over converged IP networks and the Internet – no QoS required.

Welcome to the way telepresence was meant to be. The VidyoRoom HD-50 is affordable, simple to use, easy to configure and delivers amazing performance thanks to the VidyoRouter™ architecture. Like all VidyoRoom™ products, the VidyoRoom HD-50 interoperates seamlessly with VidyoDesktop™ clients, and with legacy H.264-based H.323 and SIP endpoints via the VidyoGateway, making it possible to connect with anyone, anywhere using equipment they already have.

## Features and Functions:

### Video Performance

- PSTN-like glass to glass multi-point latency (not perceptible in call)
- Built-in network error concealment – optimal performance without QoS



### User Interface

- Intuitive Graphical User Interface – consistent with the VidyoDesk top client - makes operating the VidyoRoom simple and straightforward
- Call initiation and entry into Private Meeting Room achieved with only one click
- IR remote and keyboard/mouse control options
- Multi-tap text entry when using remote control keypad
- On-screen keyboard for convenient directory searches
- Dial pad for DTMF signaling (to support calls to legacy and voice endpoints)
- XML API for 3rd party control system integration (Crestron, AMX)
- Full and automatic integration with the VidyoPortal™ user's database. No need to maintain a local address book
- Self explanatory presence icons establish status of another user on the system
- Pop-up icon indicates that there is no available video capture device





VidyoRoom HD-50 lowers the entry price for an HD video conferencing room system while delivering telepresence quality using Vidyo's patented technology.

# VidyoRoom HD-50

- Call setup actions are context aware and based upon status of selected contacts
- Web-based configuration settings
- Auto-select or manually select number of participants viewed
- Local preview toggle

## Data Sharing

- Participants can toggle between other users' shared windows (everyone can share concurrently)
- Laptop screen sharing through the optional VGA input device

## Audio Controls

- Speakers volume adjustment and mute/unmute
- Microphone gain adjustment and mute/unmute

## Camera Control

- Video privacy mode
- Local camera pan and tilt via remote control
- Advanced Far-End-Camera-Control during a conference

## Security & Network

- Media Encryption: Optional 128bit AES
- Signal Encryption: Optional HTTPS
- Built-in NAT and Firewall Traversal

## Administration & Maintenance

- Web-based administration for remote access and configuration
- Automatic software updates, downloadable from VidyoPortal
- Conference moderation via VidyoPortal



... you and your conference participants will enjoy the natural, same-room feel and interactivity made possible by crisp, 720p 30 FPS video with imperceptible latency.

## VidyoRoom HD-50 Specifications:

### APPLICATION SPECIFICATIONS

#### VIDEO STANDARDS

H.264 SVC  
H.264 AVC, H.263+ via the VidyoGateway

#### VIDEO PERFORMANCE

Transmit resolution & frame rate at minimum bit rate

HD 720p @ 30 fps @ 768Kbps min.  
540p @ 30 fps @ 512Kbps min.  
450p @ 30 fps @ 512Kbps min.  
360p @ 30 fps @ 512 Kbps min.

Receive resolution & frame rate at minimum bit rate

HD 1080p @ 30 fps @ 2Mbps min.  
HD 720p @30 fps @ 1Mbps min.

Data sharing video resolution  
Up to WXGA (fitted to screen resolution)

#### MAXIMUM DATA RATE

2 Mbps

#### AUDIO STANDARDS

SPEEX Wideband 32KHz (16KHz audio)  
G.711 (A-,  $\mu$ -Law), G.722, via VidyoGateway

### LANGUAGE SUPPORT

English  
Spanish  
French  
German  
Italian  
Portuguese  
Japanese  
Simplified Chinese  
Korean

### DISPLAY

#### Single-screen modes


Participants' video is spread evenly on the screen  
Preferred larger voice-activated speaker  
(N+1 layout where N=up to 8 participants + 1 self view)

#### Dual-screen mode

Data full screen on second screen

#### Aspect ratio

Full-screen, 16:9 aspect ratio

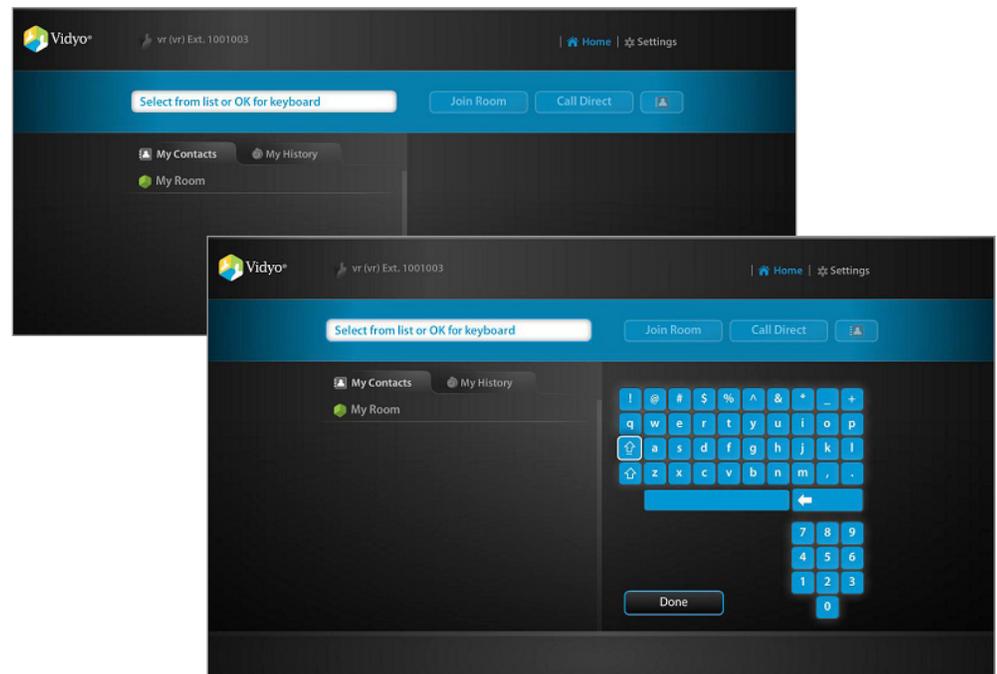

Easy to use and intuitive graphical user interface



The VidyoRoom HD-50 is affordable, simple to use, easy to configure and delivers amazing performance thanks to the VidyoRouter™ architecture.

## VidyoRoom HD-50 Specifications:

### PHYSICAL SPECIFICATIONS

#### FORM FACTOR

Stand-alone Freestanding Chassis

#### DIMENSIONS

Height 13" (330mm)  
Width 3.5" (89mm)  
Depth 12.75" (324mm)  
Gross Weight 4.6 lbs (2.1kg)

#### PHYSICAL INTERFACES

##### Camera In

1 x USB

##### Video Out

1 x HDMI  
1 x VGA (for content)

##### Audio In

1 x 3.5mm Stereo Jack

##### Audio Out

1 x 3.5mm Stereo Jack

##### USB-2.0

5 (1 front, 4 rear)

##### Network

1 x Gigabit Ethernet – Supports  
10BASE-T, 100BASE-TX, and  
1000BASE-T, RJ45 outputs

#### POWER SUPPLY

Auto-switching 300W AC to DC power  
supply w/ PFC 100 - 240V, 50 - 60Hz,  
4 - 2Amp

#### OPERATING ENVIRONMENT

##### Operating Temperature Range

10° to 35° C (50° to 95° F)

##### Non-Operating Temperature

-40° to 70° C (-40° to 158° F)

##### Humidity Range

8% - 90% (non-condensing)

##### Non-Operating Humidity Range

5% - 95% (non-condensing)

#### REGULATORY

##### Safety

EN60950-1:2006 +A11:2009 +A1:2010  
(2nd Edition)

##### Emissions

EN55022:2006 +A1:2007 & FCC Part 15  
EN61000-3-2:2006 +A2:2009  
EN61000-3-3:2008

##### Immunity

EN55024:1998 +A1:2001 +A2:2003,  
EN61000-4-2:1995 +A1:1999 +A2:2001,  
EN61000-4-3:2006, EN61000-4-4:2004,  
EN61000-4-5:2005, EN61000-4-6:2007,  
EN61000-4-8:1993 +A1:2001.  
EN61000-4-11:2004

##### Deviations

JAPAN (VCCI), AU/NZ (C-TIK), KOREA  
(KCC), CHINA (CCC), TAIWAN (BSMI)

##### Regulatory Model No

VIDYO-PROD-001

#### Vidyo, Inc.

433 Hackensack Ave  
Hackensack, NJ 07601  
Phone: +1.201.289.8597  
Toll-free: +1.866.998.4396  
Fax: +1.201.490.5340  
www.vidyo.com

© 2009-2011 Vidyo, Inc. All rights reserved. Vidyo and other trademarks used herein are trademarks or registered trademarks of Vidyo, Inc. or their respective owners. All specifications subject to change without notice, system specifics may vary. This product is covered by one or more United States and/or foreign issued and/or pending patents.